

Polar Extrem

gültig ab / valid from

10.02.2025


0,59 W/m²K

U-Wert
U-value

0,37 W/m²K

U-Wert mit ISO-Oberdeckel
U-value with ISO top cover


	A	A	B	C	D	E
	Lukenkasten frame size	Rohbaumaß rough opening size	lichte Raumhöhe floor to ceiling height	Ausklappraum fold-out space	Grundmaß basic size	Schwenkraum Oberdeckel nach hinten swivel range top cover to the rear
Version	L x B x H in mm	L x B in mm	in mm	in mm	in mm	in mm
90 / 60	880 x 580 x 130	900 x 600	max. 2650	500	1150	*
90 / 70	880 x 680 x 130	900 x 700	max. 2650	500	1150	*
90 / 80	880 x 780 x 130	900 x 800	max. 2650	500	1150	*
114 / 55	1130 x 540 x 130	1140 x 550	max. 2750	650	1200	1555
114 / 70	1130 x 690 x 130	1140 x 700	max. 2750	650	1200	1555
120 / 60	1190 x 590 x 130	1200 x 600	max. 2800	550	1200	1615
120 / 70	1190 x 690 x 130	1200 x 700	max. 2800	550	1200	1615
130 / 70	1290 x 690 x 130	1300 x 700	max. 2800	450	1200	1715
140 / 70	1390 x 690 x 130	1400 x 700	max. 2800	350	1200	1815

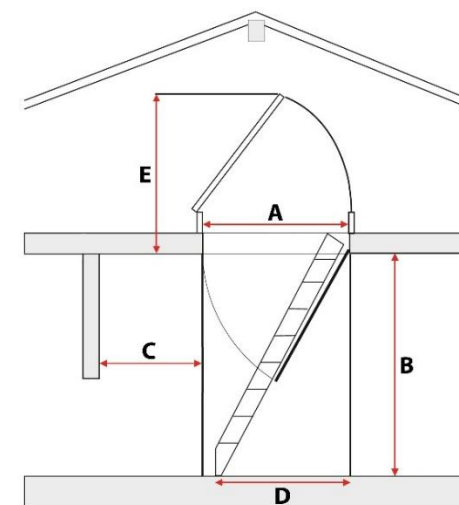

*vierteiliges Treppenspaket; bei diesen Größen ist kein Oberdeckel möglich / staircase with four sections; no top cover possible for these sizes